# RNAV STANDARD ARRIVAL CHART - INSTRUMENT (STAR) - ICAO

# PRAHA/RUZYNĚ RNAV STAR RWY 30

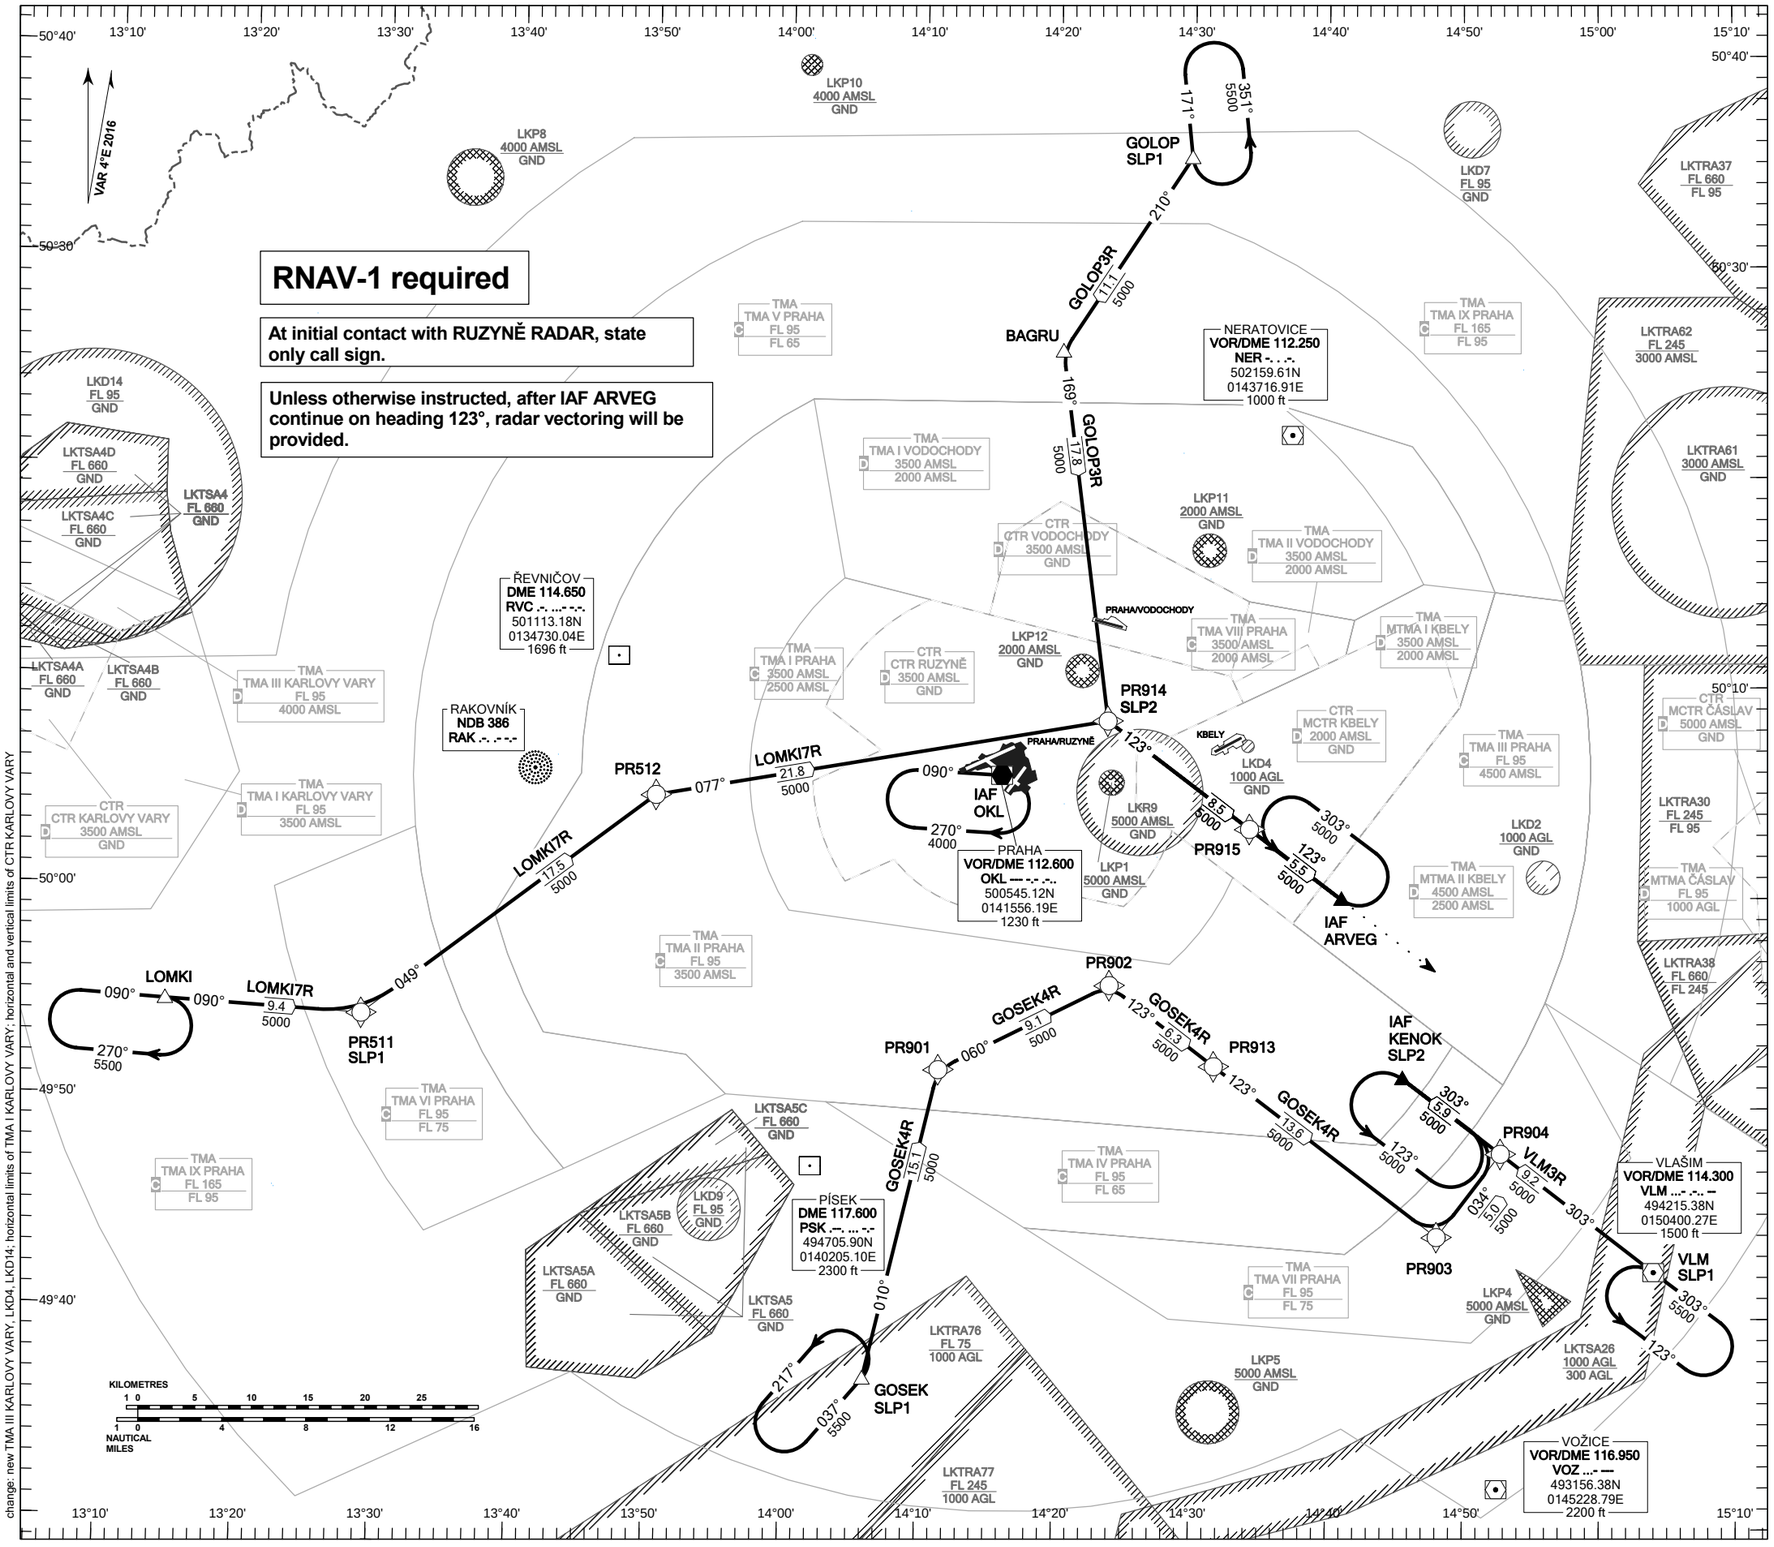


change: new TMA III KARLOVY VARY; LKD4, LKD14; horizontal limits of TMA I KARLOVY VARY; horizontal and vertical limits of CTR KARLOVY VARY

| | |
|---|---|
| PRAHA APPROACH / RADAR | 120.530 |
| | 127.580 |
| RUZYNĚ APPROACH / RADAR | 119.010 |
| RUZYNĚ RADAR / INFORMATION | 118.310 |
| SUPPLEMENTARY FREQ APP | 136.080 |
| RUZYNĚ DELIVERY | 120.060 |
| RUZYNĚ TOWER | 134.560 |
| SUPPLEMENTARY FREQ TWR | 118.110 |
| RUZYNĚ GROUND | 121.910 |
| RUZYNĚ ATIS | 122.160 |
| EMERGENCY FREQ | 121.500 |

BEARINGS, TRACKS AND RADIALS ARE MAGNETIC
ALTITUDES AND ELEVATIONS ARE IN FEET
DISTANCES ARE IN NM

MSA
VOR/DME
OKL




TRANSITION ALTITUDE
5000

| SPEED LIMITING POINT | |
|---|---|
| SLP1 | MAX IAS 250 KT |
| SLP2 | MAX IAS 220 KT |

see AIP AD 2-LKPR-30, 2.22.4.2.1.